



TYPE A  
LANE LINE

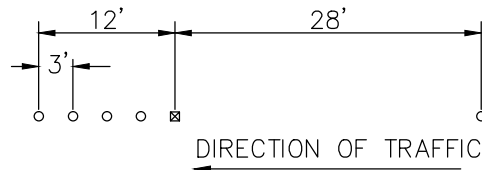


- WSDOT TYPE 1  
(4" YELLOW OR WHITE)
- ⊠ WSDOT TYPE 2  
(4" YY OR 2W  
REFLECTORIZED)

TYPE B  
DOUBLE YELLOW  
CENTER LINE




TYPE C  
TWO-WAY LEFT TURN/  
NO-PASS LINE




TYPE D  
WIDE LINE




TYPE E  
NO-PASS LINE

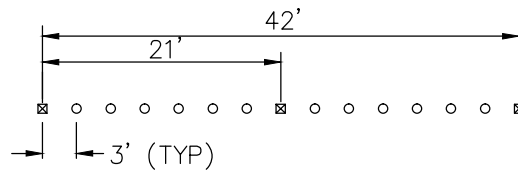


TYPE F  
DROP LANE LINE



TYPE G  
DOTTED WIDE LINE



COORDINATE  
OR STA+OFF

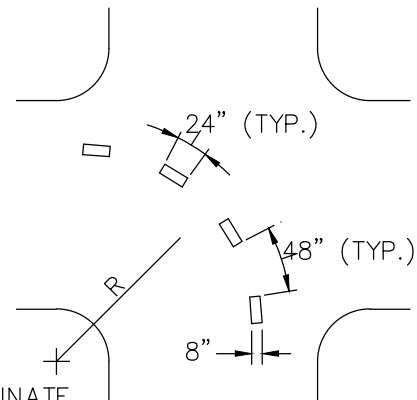

DOTTED EXTENSION  
LINE  
THERMOPLASTIC

NOTES:

1. FOR RAISED PAVEMENT MARKERS USE HOT MELT POLYMER BASED BITUMINOUS ADHESIVE.
2. BIKE LANE STRIPES ARE 8" PAINT, OR AS DIRECTED BY THE ENGINEER.
3. EDGE LANE STRIPES ARE 4" PAINT, OR AS DIRECTED BY THE ENGINEER.
4. FOR TEMPORARY PAINTED CHANNELIZATION, RETRO-REFLECTIVE GLASS BEADS SHALL BE APPLIED TO THE PAINT DURING APPLICATION. TYPE II RAISED PAVEMENT MARKERS SHALL BE INSTALLED TO MATCH COLOR AND LINE TYPE AT 40' INTERVALS.

*Rob Crittenden*

APPROVED BY: ROB CRITTENDEN  
TRAFFIC OPERATIONS SAFETY AND ENGINEERING MANAGER

REVISION DATE: MARCH 01, 2017



City of Redmond  
WASHINGTON

STANDARD DETAILS

CHANNELIZATION  
LANE LINE TYPES

FILE NAME: SD312.DWG

DETAIL NUMBER: 312